



Full Height Railings

MB-15

INSTALLATION AND OPERATION MANUAL



CE



Full Height Railings

MB-15

Installation & Operation Manual



CONTENTS

1	Application.....	3
2	Operation conditions	3
3	Technical specifications	4
4	Delivery set.....	6
4.1	Standard delivery set.....	6
4.2	Optional equipment supplied on request	6
5	Product description.....	6
6	Marking and packaging	6
7	Safety requirements	7
7.1	Installation safety requirements	7
7.2	Operation safety requirements	7
8	Installation	7
8.1	General recommendations	7
8.2	Installation tools.....	8
8.3	Installation of railings	8
9	Transportation and storage	9
10	PERCo warranty.....	10

Dear Customers!

We thank you for choosing the railings manufactured by PERCo. You have purchased the high quality product which will be long lasting in operation provided that installation and operation rules are observed.

The installation manual (hereinafter – the Manual) for MB-15 full height railings contains data necessary for transportation, storage, installation and maintenance of this product as well as the warranty obligations of PERCo.

Only qualified personnel, following the instructions of this manual, must carry out installation and maintenance.

1 APPLICATION

The **MB-15 full height railings** (hereinafter referred to as the “Railings”) are meant to separate the functional area at entrance points of facilities with high security requirements.

The railings are available in two modifications:

- main section **PERCo-MB-15R**;
- extension section **PERCo-MB-15D** (the latter does not have any fittings to be independently fixed to the floor, but is used to fill gaps of not standard size).

It is possible to use the railings in two ways:

- As a separate railing system regardless of any access control device.
- As an option to PERCo full height access control devices (full height rotor turnstiles of RTD-15 series, hereinafter referred to as the “Turnstile” and WHD-15 full height electromechanical security gate, hereinafter referred to as the “Security gate”). The railings have the same design with the named devices and can be joined with them in a single construction.

The required quantity of the railing sections is calculated based on their dimensions (Ref. Section 3).

2 OPERATION CONDITIONS

The railings on resistance to environmental exposure are compliant with GOST 15150-69, category U2 (for outside usage under the roof protection).

Operation of the railings is allowed at ambient temperature between -40°C and +55°C and relative air humidity of up to 98% at +25°C.

3 TECHNICAL SPECIFICATIONS

General view and dimensions of railings are shown in Table 1 and Figure 1.

Railing sections of both modifications are made of durable aluminum and covered with high quality powder paint. An example of the railings connected in one unit is shown in Figure 2.

Table 1 Overall dimensions MB-15

Characteristics	Railings Modification	
	MB-15R	MB-15D
Length, mm	820	700*
Width, mm	120	60
Height, mm	2150	2115
Weight, kg	21.5	9.4

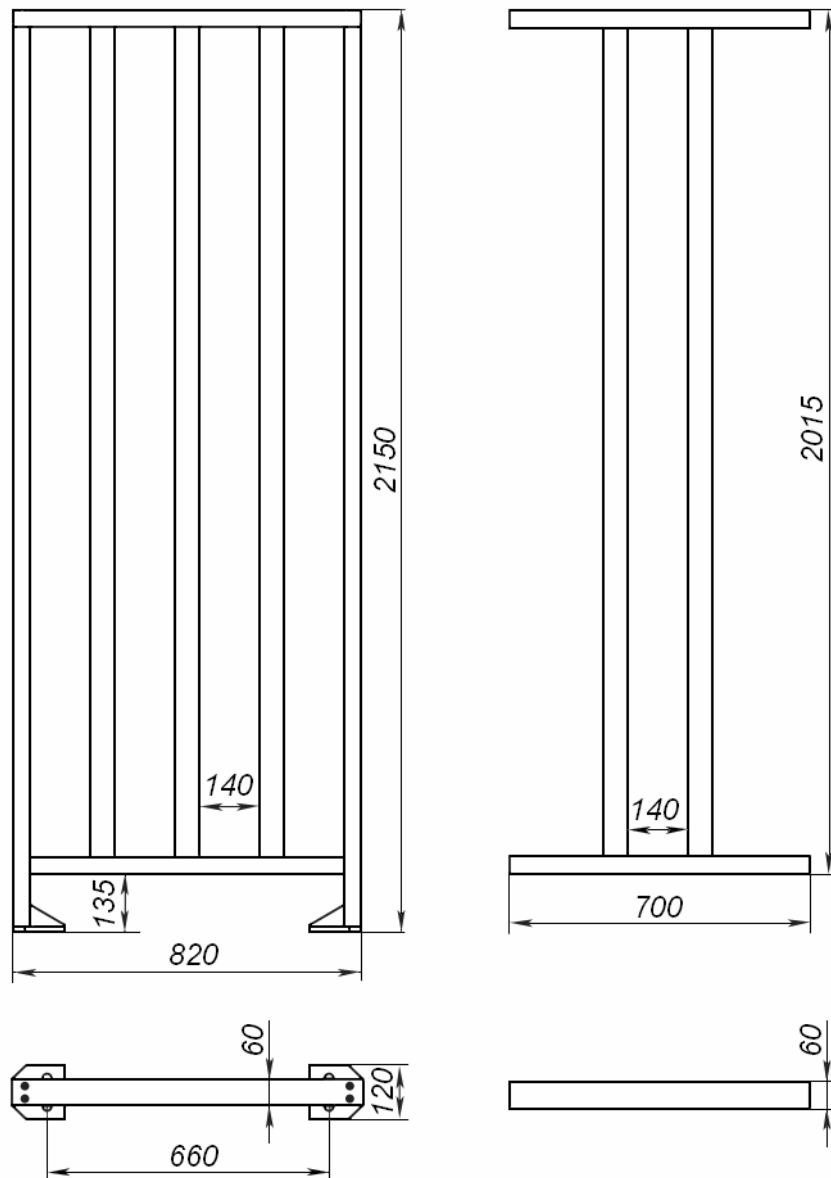


Figure 1 Overall view and dimensions MB-15R railing and MB-15D extension section

* During the installation can be reduced to 260 mm

**Note**

Distance between holes for fixing the main section to the extension section is shown on Fig. 3.

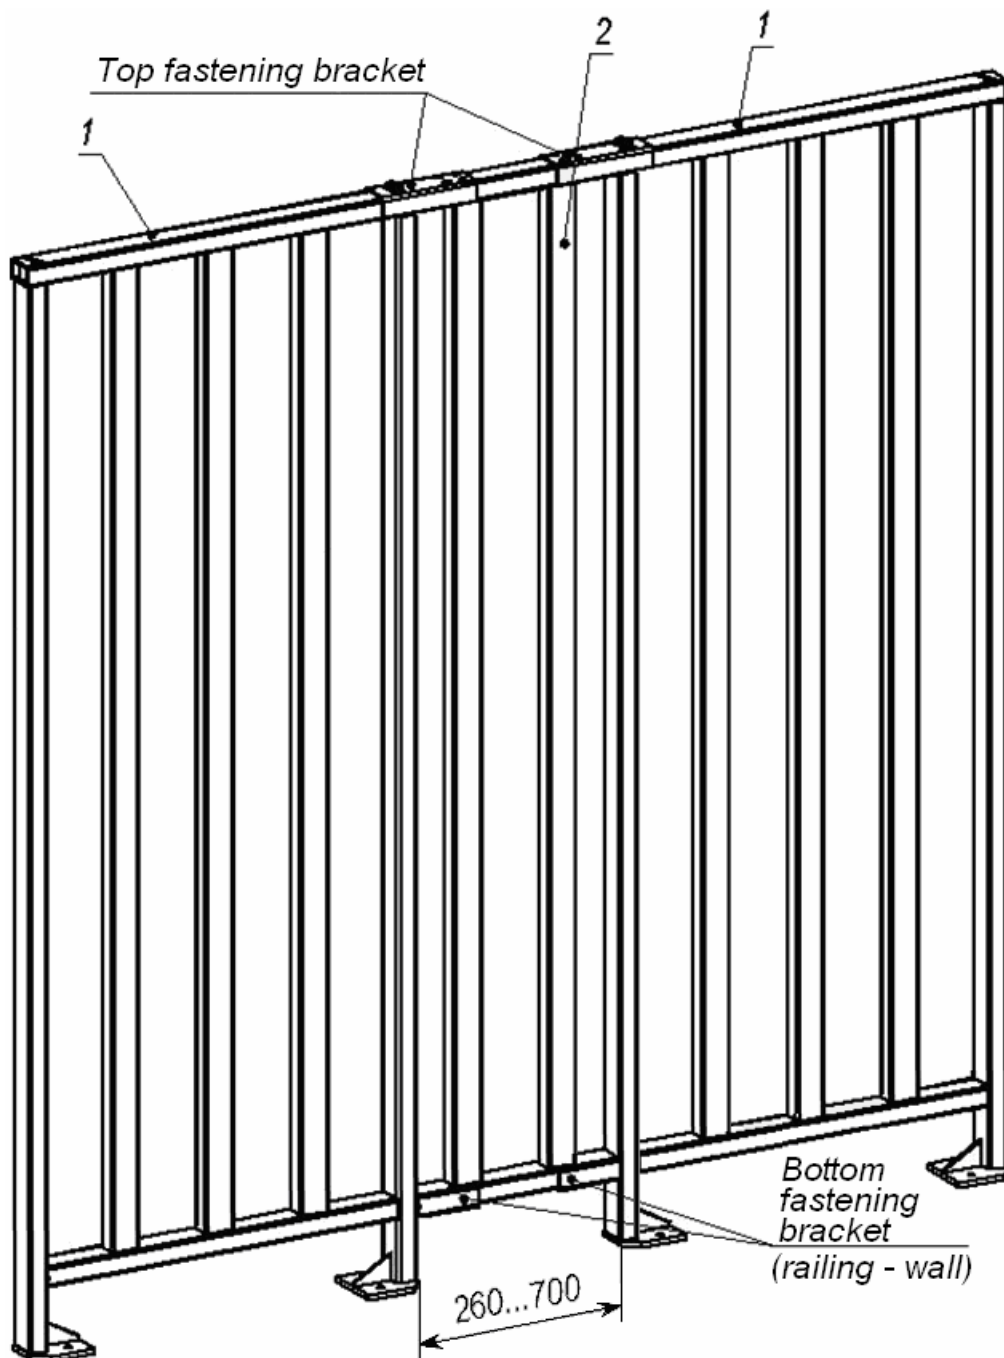


Figure 2 Sample design of the railings:

- 1 – MB-15R railings;
- 2 – MB-15D extension section.

4 DELIVERY SET

4.1 Standard delivery set

Main Equipment:

- MB-15R railing.....required number
- MB-15D extension section.....required number

Documentation:

- Installation manual 1

Packaging:

- Transportation box for MB-15R railing.....required number
- Transportation box for MB-15D extension section.....required number

4.2 Optional equipment supplied on request

Additional mounting tools can be added to the standard delivery set upon request:

- PFG IR 10-15 anchor with bolt M10 4 pcs. for one main section
- Connecting components:
 - brackets for connection of railing sections together, with a turnstile (or its canopy), with a gate or with a wall.....required number

5 PRODUCT DESCRIPTION

Main features of the railings are the following:

- Two possible ways of use – as a separate railing located on the passageway regardless of any other access control devices used or in addition to PERCo full height turnstiles and security gates making a joint construction with them;
- High corrosion resistance of the product, which is made of an aluminum alloy, ensures a long term service even in unfavorable environment;
- High strength polymer powder coating keeps surface undamaged even under heavy use.

6 MARKING AND PACKAGING

Railings in standard delivery set (Ref. Clause 4.1) are packed in transportation boxes in order to protect them from the damage during transportation and storage.

Refer to Table 2 for overall dimensions and weight of transportation boxes (as standard).

Boxes are labeled with the packaged product’s name and additional marking stickers with a number of characters.

Table 2 Transport boxes for railing sections

Packaging Type	Box dimensions (length x width x height, mm)	Weight of a box, kg
MB-15R	2215×930×202	54
MB-15D	2115×765×136	30

7 SAFETY REQUIREMENTS

7.1 Installation safety requirements

The installation should be carried out only by the qualified personnel after the careful study of this manual.



Warning!

- Use only serviceable tools for installation.
- During the installation of the railing sections one should be especially careful to prevent them from falling.

7.2 Operation safety requirements



Don't!

- Do not subject the railings to jerks and hits;
- Avoid using substances that can cause surface damage when cleaning.

8 INSTALLATION

8.1 General recommendations

Installation of railings is an important operation which impacts serviceability and life time of the product. Prior to installation works carefully study this section and follow the instructions given here.



Warning!

The manufacturer is not liable for the damage of railings or any other equipment, as well as for other damages caused by improper installation and rejects any claims of the customer if installation was performed with violation of the manual instructions.

Installation recommendations:

- At least two qualified installers should carry out installation works.
- Install railings on strong and level concrete or stone foundations (concrete with characteristics not less than mark 400, strength B22.5), at least 150 mm thick.
- If the foundation is not strong and level enough use reinforced foundation plates of 300×300×300 mm size.
- Before the railings installations check the horizontality and flatness of the foundation and align it if necessary; the maximum allowable deviation is 1.5 mm.
- Apply «SORMAT» anchor bolts for the installation.

Recommendations for preparing of holes for installation of PERCo-MB-15R are given on condition that PFG IR10-15 (16×60 mm) anchor bolts for concrete floors are used. 4 anchor bolts shall be used for installation of one section.

8.2 Installation tools

During the installation works it is recommended to use the following tools:

- 1.2 – 1.5 kW hammer drill;
- Angular cutting machine 0.6 kW;
- An electric drill 0.6 kW;
- Ø16 mm hard alloyed drill bits;
- Drill bit Ø3.5 mm;
- Socket wrench S13; S17;
- Allen key S4; S6; S14;
- Cross-head screwdriver №2 150 mm;
- Flat slot screwdriver № 5 150 mm;
- Caliper -I-250;
- Measuring tape 3 m;
- Plumb line and level;
- Two ladders with at least four steps.



Note

The application of other instruments is allowed if it doesn't reduce the quality of installation works.

8.3 Installation of railings

Further in this section the installation operations are described in accordance with the recommendations given above (Ref. Section 8.1).

1. Unpack the railings and check the delivery set compliance according to the Section 4.1.
2. Mark out the installation holes on the mounting surface as per Figure 3.
3. Prepare the mounting holes. Insert the anchors as deep as possible into the holes prepared.



Warning!

In carrying out further works before fastening the railing sections be very careful to protect sections from falling.

4. Fasten the MB-15R railing with bolts, tighten it only preliminary using little efforts, providing an opportunity of the deviation from the vertical section.
5. Check with the level if the section is installed vertically (mounting pads can be used.) Fasten the bolts properly.
6. The MB-15D extension section can be cut according to the gap width. The length of the additional section can be reduced to 260 mm if necessary (Ref. Figure 2).



Note

The manual provides information on connection of railing sections together with corresponding brackets. Different types of connection with a turnstile (or its canopy), with a gate or with a wall and necessary tools, and also the installation order are not provided. This information is provided by assembly documents for specific complex order of equipment.

7. To the joints between the sections apply corresponding fastening brackets and mark Ø3.5 mm through the existing holes in the brackets for screws).

8. Drill holes according to the marked out pattern $\varnothing 3.5$ mm, and connect the MB-15R railing and MB-15D extension section together using fastening brackets and screws.
9. Check all the bolted connections of the railings and fasten them if necessary.
10. The railing is installed.

Please contact PERCo technical department if you need assistance.

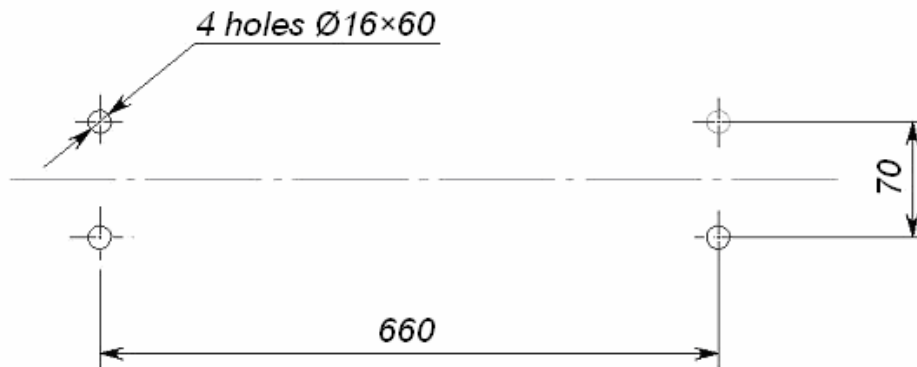


Figure 3 Installation holes for the MB-15R railing

9 TRANSPORTATION AND STORAGE

Railings in the original package should be transported in closed type cargo transport units only (trains, containers, closed vehicles, in the holds, planes, etc.).

During the transportation the boxes can be stacked in 2 rows.

Storage of the railings is allowed indoors at ambient temperature between -40°C and $+55^{\circ}\text{C}$ and at relative air humidity up to 98% at $+25^{\circ}\text{C}$.

The storage room should be free from acid vapors, alkalis and gases that can cause damage.

After the transportation and storage of the railings at low temperatures or at high air humidity it must be kept unpacked for not less than 24 hours indoors within normal climate conditions corresponding to the operation conditions (Ref. Clauses 2) prior to installation.

10 PERCO WARRANTY

PERCo (the Manufacturer) warrants that the **MB-15 railings** (the Product) comply with applicable statutory safety requirements, provided that the instructions on storage, installation and operation, given in the Installation Manual, are observed.

The warranty period is **12 (twelve) months** commencing from the date of sale. Should there be no date of sale on the warranty card, the warranty period shall commence from the date of manufacture specified on the Product label.

In the post-warranty period the replacement parts/components are warranted to be free from defects in material or workmanship for a period of 3 (three) months from the date of shipment of the repaired/replaced Product to the Customer.

All claims with regard to quantity, completeness and defects to appearance of the Product delivered are accepted by the Manufacturer in writing within no more than 5 (five) working days after the products are received by the Customer. In case of failure to meet the abovementioned deadline no claims are accepted.

The Warranty does not cover:

- products, parts and components with:
 - external mechanical damages resulting in the Product's fault;
 - defects resulting from Customer's improper testing, operation, installation, maintenance, modification, alteration, or adjustment;
 - damages due to force majeure circumstances (natural disasters, vandalism etc.) or defects as a result of external circumstances (power surges, electric discharge, etc);
- fuses, accumulators, galvanic elements and other components, replacement of which is performed by the Customer in accordance with the Product's in-line documentation.

To the maximum extent permitted by the acting law, the Manufacturer does not incur a liability for any direct or indirect losses of the Customer, including but not limited to loss of profit or data, losses caused by idle period, missed profit, and etc related to use or impossibility to use products and software, including possible software errors and failures.

Within the warranty period the products are repaired free of charge at the Manufacturer's site. The Manufacturer reserves the right to repair failed product or replace it with an operational one. Time of repair is specified at the moment the Product is accepted for repair. Transportation cost to and back from the place of repair shall be borne by the Customer.

In order to shorten the repair time the Customer must inform the Manufacturer's Technical Support Department (the TSD) of the problem with the Product's operation and/or about the origin of the fault by submitting a filled-in Technical Support Form by e-mail, fax or via the Manufacturer's website or communicate directly a specialist of the TSD. The Manufacturer reserves the right not to accept the Product for repair from the Customer who failed to submit the Technical Support Form

The Manufacturer's warranty obligations don't cover attendance by the experts of a Customer and maintenance of any Product on site.

If in the course of the examination taken by the Manufacturer of the Product or its parts/components believed to be faulty, no faults have been detected, the Customer is responsible for compensation of the Manufacturer's expenses related to the examination.

Apart from the warranties mentioned above the Manufacturer does not provide any other warranties with regard to compatibility of a Product purchased with software or products produced by other manufacturers as well as any warranties that this Product will fit for the purposes not stipulated in the Product's in-line documentation.

The warranty does not provide for any claims with regard to the technical specifications of the Product in case they are in compliance with those stated by the Manufacturer. The Manufacturer does not guarantee that the Product purchased will meet Customer's requirements and expectations.

Please note that PERCo produces technically sophisticated products that, if not faulty, cannot be returned back if by some reason the customer deems them unsatisfactory.

WARRANTY CARD



MB-15 railings

Product modification	MB-15R	
	MB-15D	

Date of manufacture: « » _____ 201__ года

Quality Control Seal

Date of sale: « » _____ 201__

(signature, seal)



Cutting line

Warranty Repair Coupon



MB-15 railings

Product modification	MB-15R	
	MB-15D	

Date of manufacture: « » _____ 201__ года

Quality Control Seal

Date of sale: « » _____ 201__

(signature, seal)

PERCo

Polytechnicheskaya str., 4, block 2
194021, Saint Petersburg
Russia

Tel: +7 812 247 04 64

**E-mail: export@perco.com
support@perco.com**

www.perco.com



www.perco.com